


Please read this leaflet carefully when you install KX-HTS series and KX-HDV series to the existing user network.




For your information, Video Instruction about the installation is uploaded on the Panasonic Web site at: <https://channel.panasonic.com/contents/19893/>

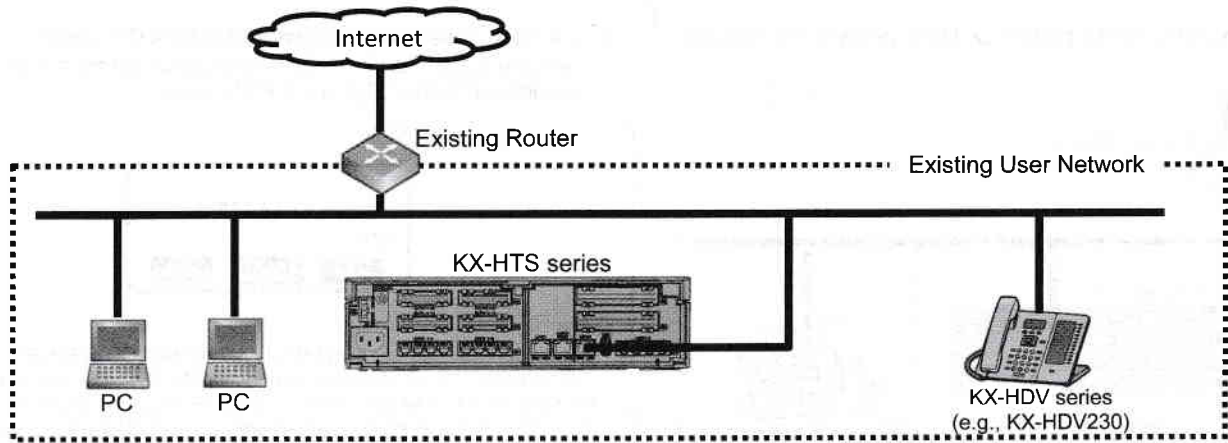

Step 1: Program KX-HTS series

1. Connect KX-HTS series to the existing User Network, and then connect the PC to the KX-HTS series as the figure.

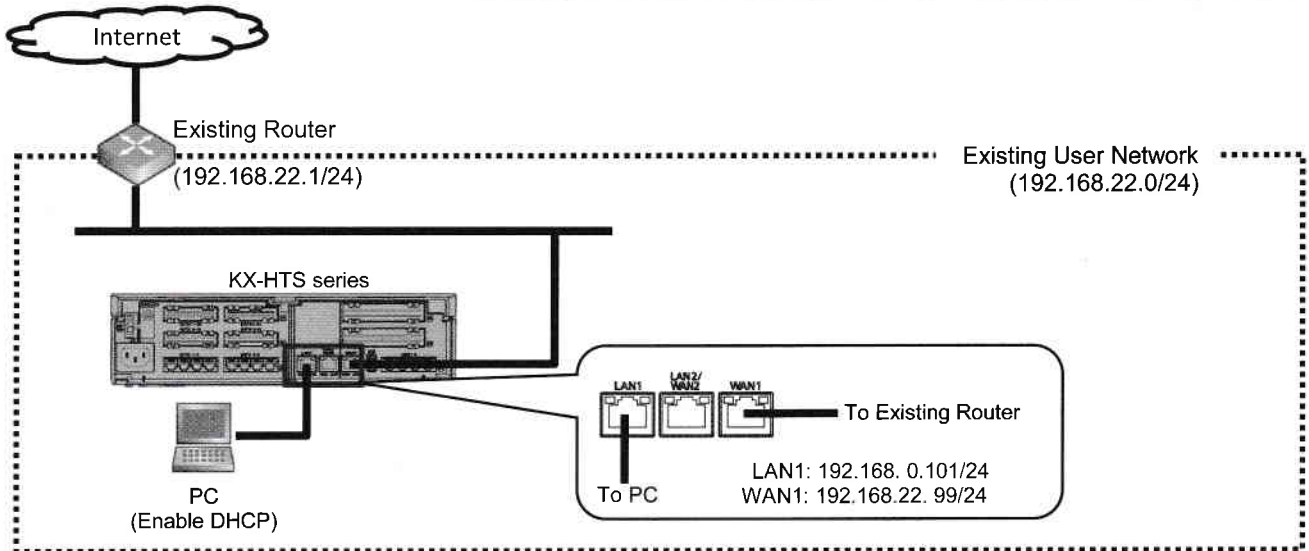

2. In Easy Setup Wizard, configure the following settings for KX-HTS series


- a. Set the IP address, Subnet Mask, and Default Gateway for the WAN1 port

Note


Configure the settings according to the IP address system of the existing user network. Also, set the IP address which does not duplicate other IP device.

- b. Disable the Firewall setting

Easy Setup Wizard (6.IP-2)




Easy Setup Wizard (6.IP-2)

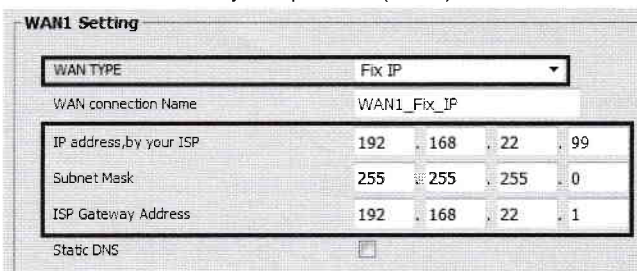

Step 2: Connect KX-HDV series to the existing user network

1. Connect the "LAN" port of KX-HDV series to the existing router.

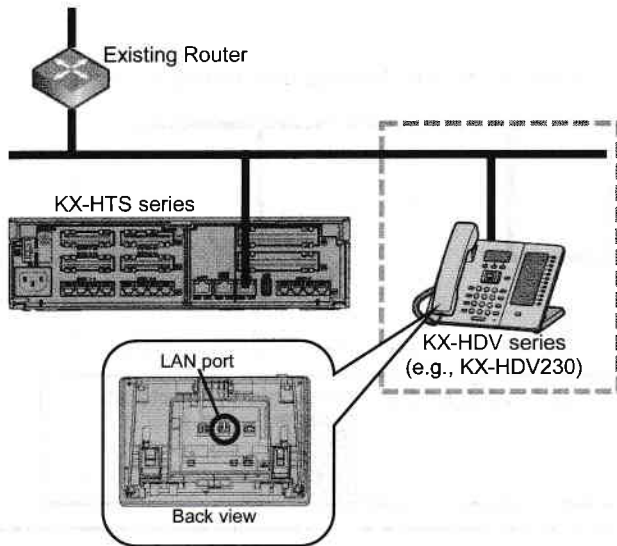

2. KX-HDV series will be registered to KX-HTS series automatically. Confirm that an extension number (e.g., 101) is displayed on the LCD of KX-HDV series.

e.g., K-HDV230:



Note

If the extension number is not displayed on the LCD of KX-HDV series for more than 10 minutes after connecting the KX-HDV series to the KX-HTS series, initialize the KX-HDV series. Refer to the Web site at: <https://panasonic.net/cns/pcc/support/pbx/manual/kx-hts/index.html>

Repeat Step 2 for the number of KX-HDV series to be registered.